


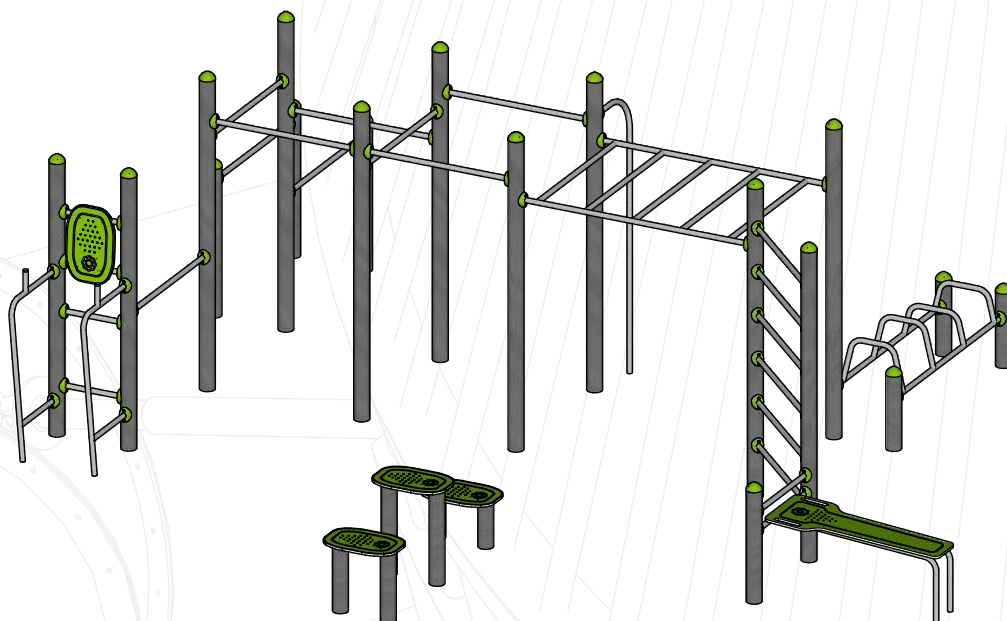

informazioni / information

dimensioni / dimension cm.	UNI 1176 altezza di caduta / free fall height cm.	UNI 16630 altezza di caduta / free fall height cm.	età d'uso anni / age of use years	UNI 1176 sicurezza / security area cm.	UNI 16630 sicurezza / security area cm.	UNI 1176 antitrauma/safety matting m ²	UNI 16630 antitrauma/safety matting m ²
673x753	219	119	>6	1053x973	1053x973	83.5	no

XSP 460 CALISTENIC STREET WORKOUT MULTI-ESERCIZIO COMPOSTO DA:

- montanti tubolari in lega di alluminio EN A W - 6060 a sezione circolare, verniciato con vernici a polveri termoindurenti RAL 7016 diam. 12
- barre tubolari in acciaio inox
- Pannelli sagomati in polietilene colorato
- calotte di copertura in pvc
- agganci in polietilene a stampo rotazionale
- kit bulloneria zincata per assemblaggio in tappi plastici

XSP 460 CALISTHENICS STREET WORKOUT MULTI-EXERCISE COMPOSED OF:

- tubular uprights in aluminum alloy EN A W - 6060 with circular section, painted with thermosetting powder paints RAL 7016 diam. 12
- tubular stainless steel bars
- Shaped panels in colored polyethylene
- pvc cover caps
- rotational molded polyethylene hooks
- galvanized bolts kit for assembly in plastic caps

attività ludiche / play activities :



material / materials :

alluminio	AL
aluminium	
polietilene	PE
polyethylene	

accessibile con disabilità
accessible with disabilities :



- ☐ motoria / motorial
- ☐ sensoriale / sensorial
- ☐ cognitiva / cognitive

responding to
EN-1176
EN-16630
Tüv Certified

utilizzatori
users

20

