


profondità scavi / depth of excavation 60 cm.
profondità scavi / depth of excavation 50 cm.
staffa anti trauma sfuso / bracket for loose safety matting

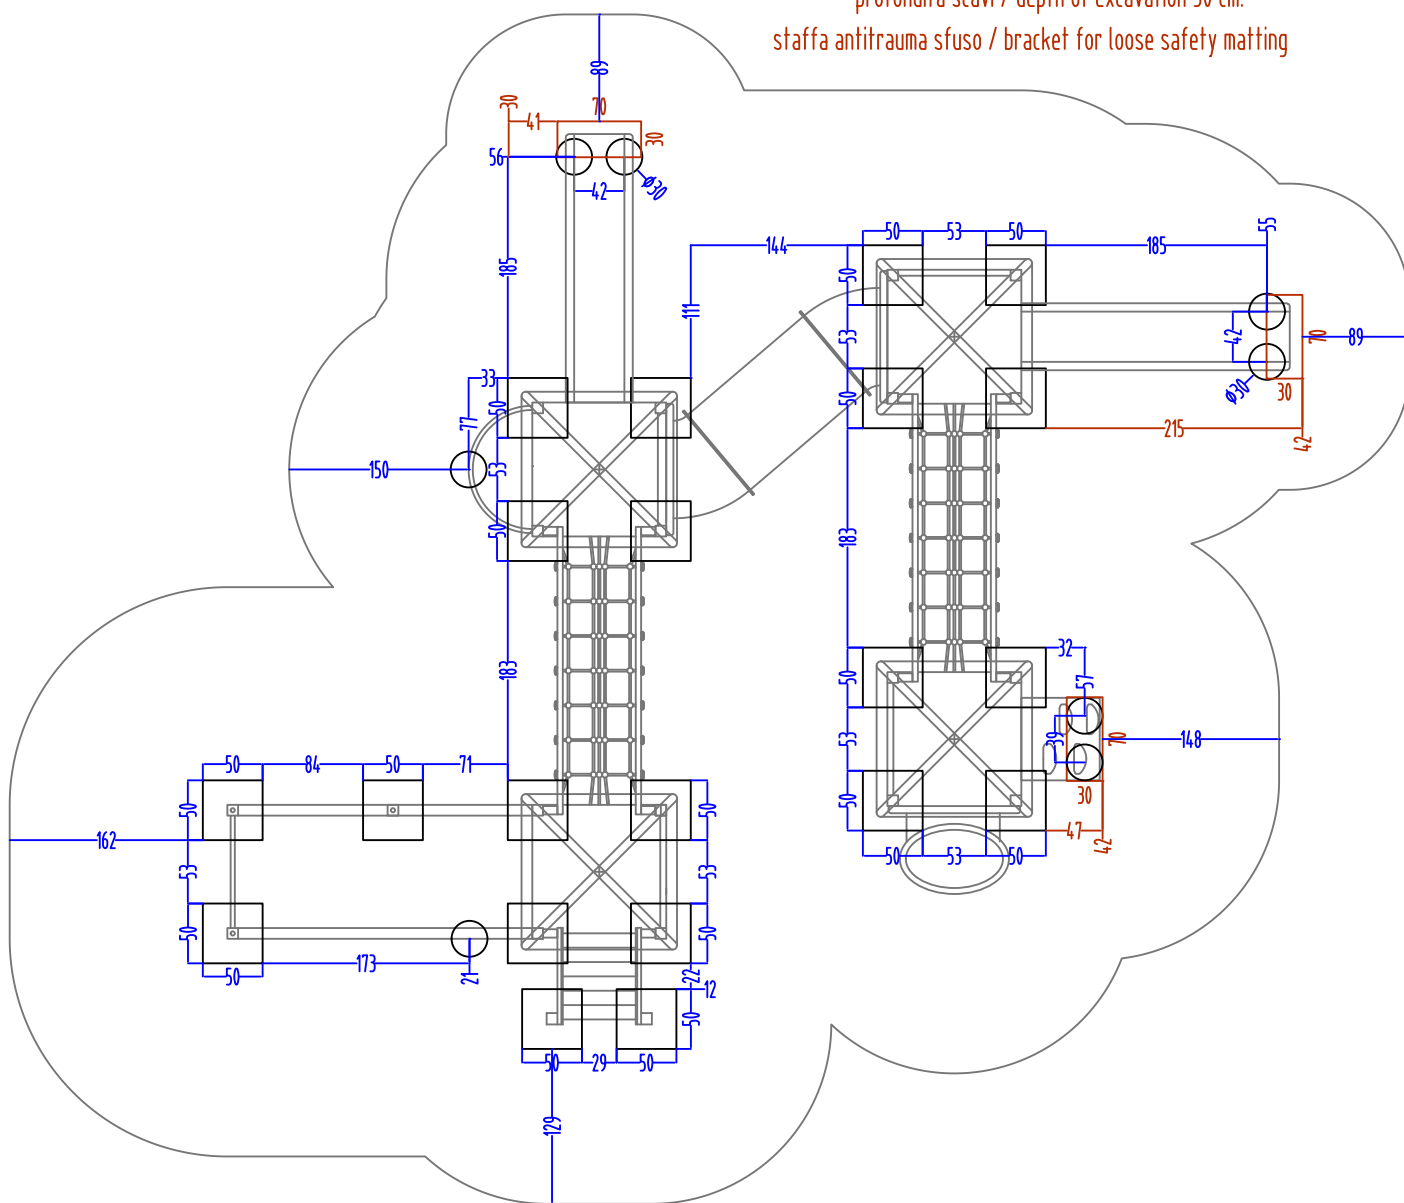

modifiche / amendments :			scala / scale : -		misure espresse in / dimensions are established in : CM.			
nr°	data/date	pos	descrizione/description	firma sign	informazioni generali / general informations : • sezione/diameter legname impregnato $\geq$ 0.5 (cm) • lunghezza /legname impregnato $\geq$ 10% (length, totale) • lavorazione legname impregnato $\geq$ 0.2 (cm) • componenti in metallo 1 (mm) • componenti in materiali plastici $\geq$ 15 (mm)		le colorazioni dei componenti rifiniturati sono solo indicative e potranno variare a ns/ discrezione. Il presente elaborato grafico è da considerarsi illustrativo. La sua reale fattibilità deve essere preventivamente verificata in loco prima della conferma d'ordine. Messura responsabilità portante sarà da affidarsi alla spremita. The colours listed are visible in the rendering are just illustrative and can be modified. The graphic design as well is illustrative, and customers are compelled to verify the equipment's real feasibility before finalizing the order. We do not accept claims for similar	
01							denom. / name : pianta scavi / excavation plant	
02							nr. dis. / draft nr. : 4049	
03							codice / code : xm402/xoxi402	
03							luogo / place : Mezzolombardo	
							data / date : 16/02/18	
esecuzione/verifica approvazione : created/checked/approved by :								